



## Specification Sheet for LED Color-Temperature Adjustable Strips

Model: QL-F3528A60T-HA-12/24




### Applications:

- ★ Car decoration
- ★ Architectural decorative lighting
- ★ Archway, canopy and bridge edge lighting
- ★ Auditorium walkway lighting
- ★ Backlighting for signage letters
- ★ Channel letter lighting

### Product features:


- ★ Various angle 120degrees
- ★ Linear separ LED strip on flexible PCB with self-adhesive back, 3LEDs a group for DC12V 6LEDs for DC24V
- ★ Made of leaded LEDs with lighting emitting in the direction of PCB
- ★ Work Voltage: DC12V/DC24V
- ★ Anti-Uv Design

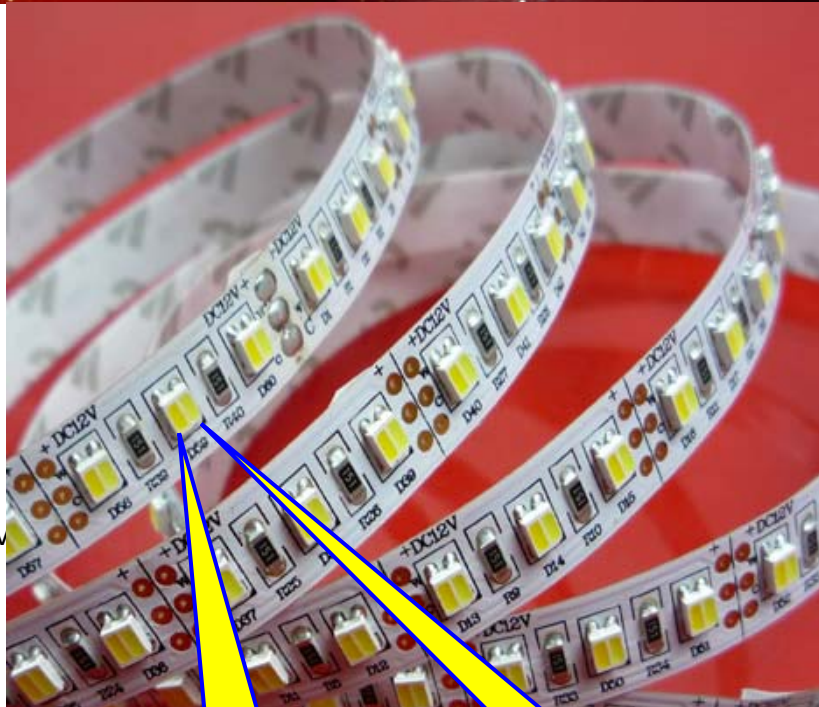


Warm White

Pure White

### Dimensions of DC12V Version:

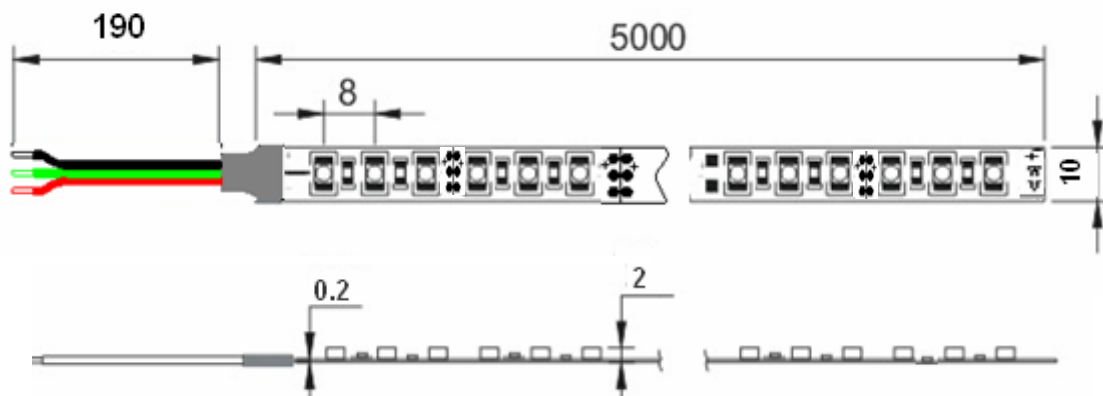


Dimensions of DC24V Version:

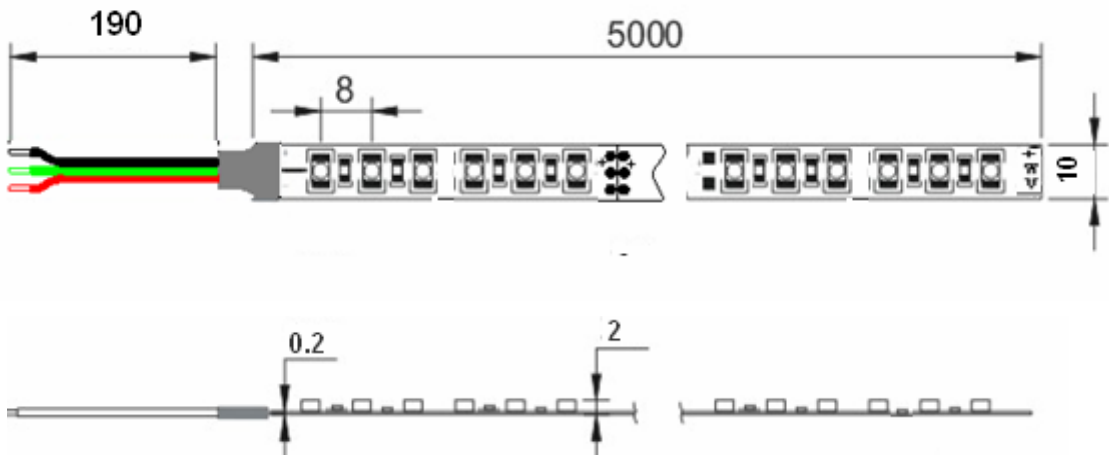

Specifications:

Model No.	LED Qty	Work Voltage	Power	View Angle	Waterproof	Packing	Color and Luminous	(CT:K)
QL-F3528A60T-HA-12	SMD 3528 120/m One LED With Two chip	DC12V	19.2W/m	120°	No	5m/reel	Warm White: 540lm-600lm Pure White: 600lm-700lm	3000-7000K
QL-F3528A60T-HA-24	One pure white One warm White	DC24V						

Connection Instruction:

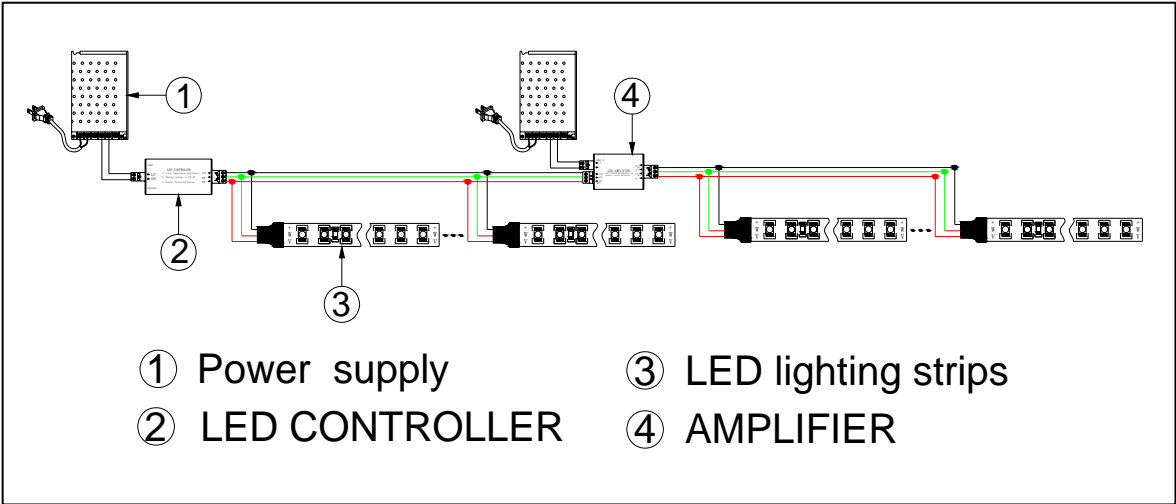

Notice:

Before application, please make sure the power supply is in accordance to the strips